



DeCORE AFCl-45

DeCORE AFCl-45 is an anionic **amine-free**, water-soluble, multi-metal corrosion inhibitor recommended to protect a variety of metals including aluminum, copper, brass, bronze, steel, cast iron, ferrous and non-ferrous metals in aqueous systems. **DeCORE AFCl-45** is also a very effective hydrotrope for alkaline systems.

SPECIFICATIONS

Appearance @ 25° C:	Clear yellow liquid
Color (Gardner):	5 max.
% Solids:	43.0% - 47.0%
pH (as is):	9.0 – 11.0

SOLUBILITY (10% by weight): DeCORE AFCl-45 is soluble in water, alcohols and glycols. It is insoluble or dispersible in solvents and oils.

TYPICAL PROPERTIES

Density @ 25°C ~1.0 g/ml

- Corrosion inhibitor for metal in aqueous systems at pH \geq 7
- Effective on multiple metals including aluminum, brass & copper
- Prevents flash rust on steel
- Not stable in acid systems
- Low – moderate foaming
- Hydrotrope for alkaline systems
- Biodegradable
- Amine-free
- Azole-free
- Non-phenolic
- Phosphate-free
- Boron-free
- Nitrite-free

APPLICATIONS

- Alkaline metal cleaners
- Synthetic coolants & cutting fluids
- Industrial cooling towers
- Water based lubricants
- Low foam alkaline cleaners
- Radiator fluids & cleaners
- Water based paints & coatings

Continued

Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

Corrosion Testing using DeCORE AFCI-45

Metal Panel Submersion Test at Room Temperature

The bottom half of each metal panel was submerged in solution containing 0.25% - 1.0% DeCORE AFCI-45 by weight, in hard water (100 ppm as CaCO₃ & 71 ppm as chloride) at room temperature. The top half of the panel was exposed to the vapor phase in closed glass containers. All results are after 12 weeks elapsed.

Steel Panels: SAE 1010 Cold rolled steel (mild carbon)

No Inhibitor 1.0% 0.5% 0.25%




Aluminum Panels, #2024 Bare Aluminum

No Inhibitor 1.0% 0.5% 0.25%




Copper Panels: #110 Copper (99.95% Cu)

No Inhibitor 1.0% 0.5% 0.25%

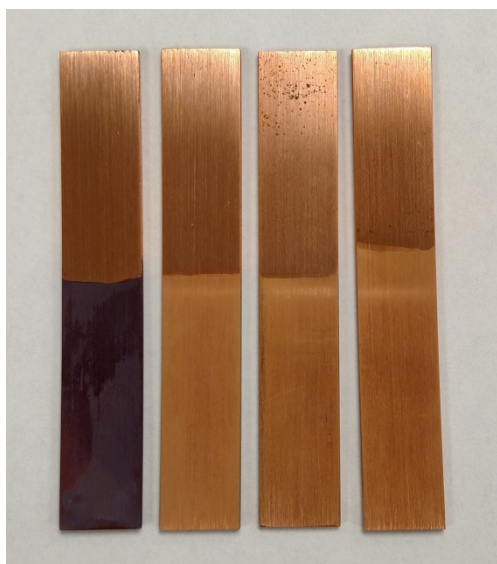

Brass Panels: #260 Brass Alloy (30% Zn / 70% Cu)

No Inhibitor 1.0% 0.5% 0.25%

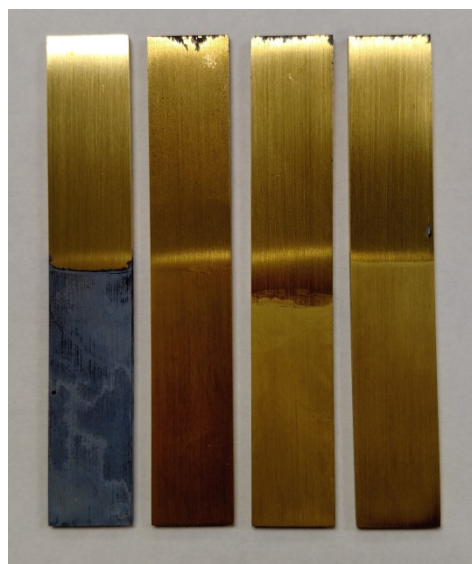

Continued

Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

Metal Panel Submersion Test at Elevated Temperature & High Chloride Environments

Test Conditions

Hard Water Solutions: 300 ppm as CaCO₃ & 210 ppm as chloride

DeCORE AFCI-45 level tested: 1.0% by weight (0.5% active)

Solution pH: Solutions were adjusted with 0.1N NaOH from pH 6.25 to pH 8.75 – 9.0.

Time/Temperature: 24 hours @ Room Temperature (RT) & 200°F

The bottom half of each metal panel was submerged in solution whereas the top half of the panels were exposed to the vapor phase in closed glass jars. Controls do not contain corrosion inhibitor.

The following results indicate DeCORE AFCI-45 is an effective inhibitor for multiple metals under these test conditions.

Panels from left to right: RT control, RT w/inhibitor, 200°F w/inhibitor, 200°F control

Steel Panels: SAE 1010 Cold rolled steel (mild carbon)



Aluminum Panels, #2024 Bare Aluminum



Copper Panels: #110 Copper (99.95% Cu)



Brass Panels: #260 Brass Alloy (30% Zn / 70% Cu)



Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995

www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

DeCORE AFCI-45: Flash Rust Prevention

Flash rust can occur on steel after any wet method of surface preparation as the surface dries. It can occur quickly – within minutes- or at most, after a few hours. The following quick-screen test shows that DeCORE AFCI-45 is an effective flash rust inhibitor for cold rolled steel.

First Beaker: Acidified tap water (pH 7.01) with a few drops of a 10% citric acid solution to final pH 5.35


Second Beaker: 1% by weight DeCORE AFCI-45 added to acidified tap water to final pH 5.39

Third Beaker: Acidified distilled water (pH 5.53) with a few drops of a 10% citric acid solution to final pH 3.45

Fourth Beaker: 1% by weight DeCORE AFCI-45 added to acidified distilled water to final pH 5.38

A cold rolled steel panel was placed into each solution and allowed to soak for ~1 hour at room temperature without covering the beakers. No rust was observed in the liquid phase on any of the panels prior to removing from solution. The steel panels were removed and allowed to air dry without rinsing.

Flash rust forms on the panels without DeCORE AFCI-45 present in solution within a few minutes of air drying. **No flash rust forms on the panel with DeCORE AFCI-45 present.**

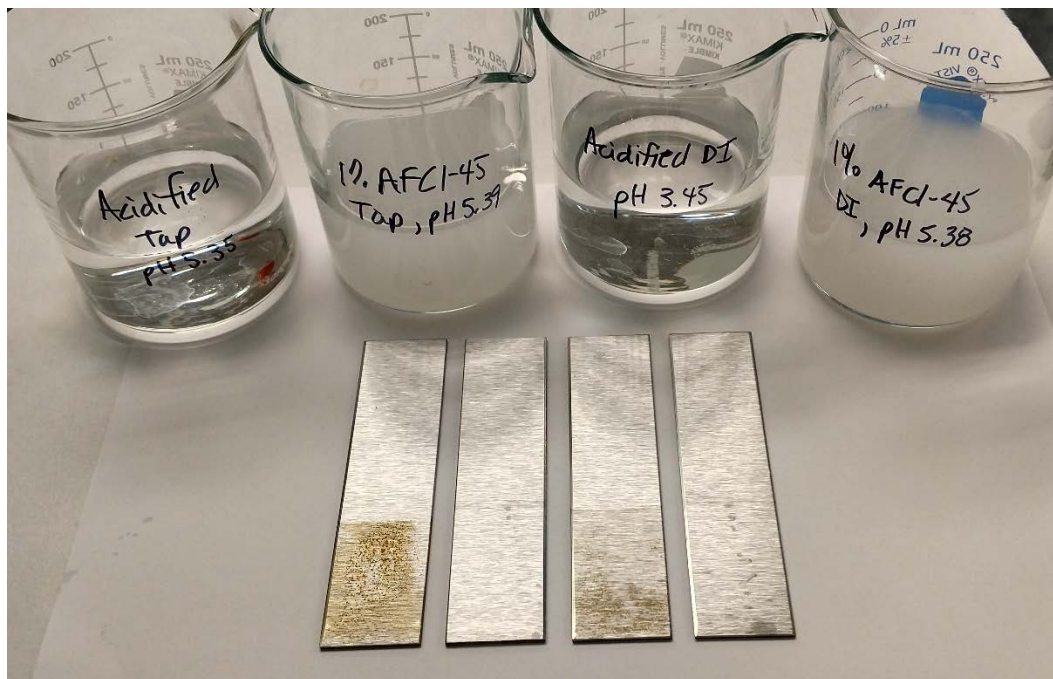

Continued


Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

DeCORE AFCl-45 Hydrotrope Data

DeCORE AFCl-45 is an excellent hydrotrope for alkaline systems as depicted in the graph below. Performance was determined and compared to several other DeForest hydrotropes and to SXS-40.

Each hydrotrope was solubilized in a caustic or alkaline electrolyte solution followed by addition of nonylphenol ethoxylate (NPE-9.5). Each sample was heated to the temperature at which the NPE-9.5 clouds out of solution. The higher the cloud point temperature, the more efficient the hydrotrope.

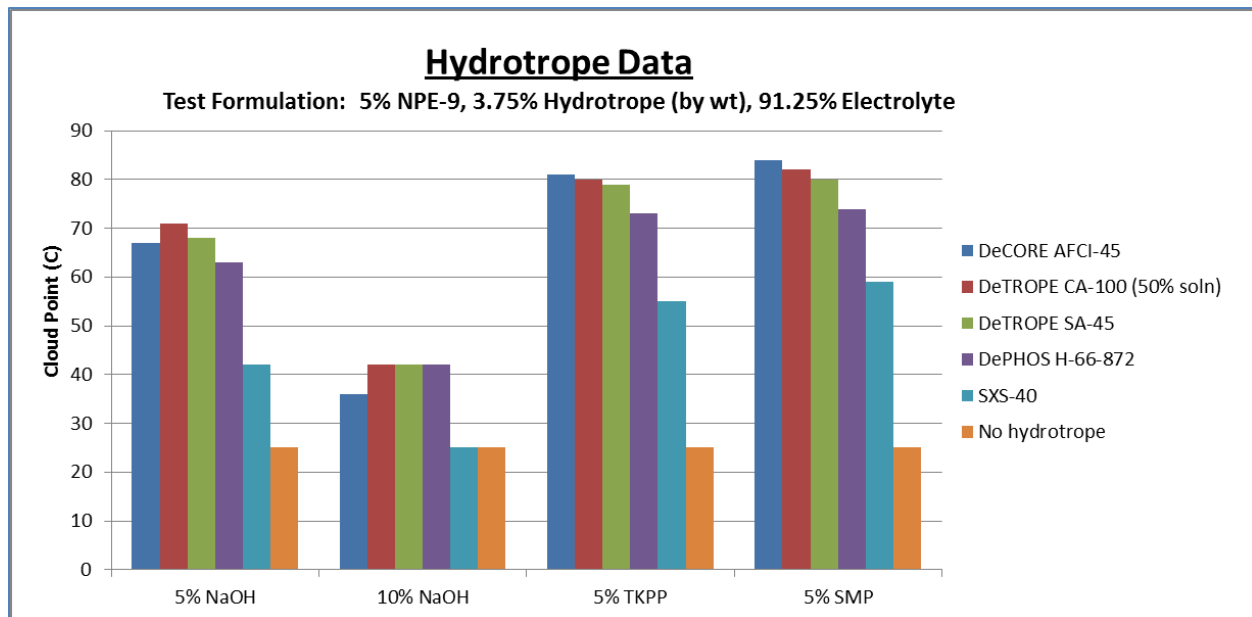

Key: NaOH = Sodium Hydroxide, SMP = Sodium Metasilicate Pentahydrate, TKPP = Tetrapotassium Pyrophosphate

Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.