

DeTROPE SA-45

DeTROPE SA-45 is a 45% active sodium alkanoate in water. This anionic surfactant is a highly effective, multifunctional, low foam hydrotrope recommended for use in cleaners at pH above 7. It is chlorine stable and also exhibits wetting and corrosion inhibition properties.

SPECIFICATIONS

Appearance @ 25°C:	Clear, water white liquid
Color (Gardner):	1 max.
% Activity:	45.0 +/- 1.5%
pH (as-is):	10.0+/- 1.0

SOLUBILITY DeTROPE SA-45 is soluble in water, alcohols and glycols. It is insoluble or dispersible in oils and solvents. It is also soluble in 10% sodium hydroxide, 20% potassium hydroxide, and in a variety of other electrolytes such as silicates, phosphates and carbonates.

TYPICAL PROPERTIES

Density @ 25°C ~1.05 g/ml

- Excellent hydrotrope
- Chlorine stable (up to 5% active NaOCl)
- Excellent solubilizer for nonionics in alkaline and electrolyte systems
- Excellent alkali and electrolyte stability
- Contributes wetting properties
- Approved for use as inert in non-food pesticide formulations
- Readily Biodegradable
- Non-phenolic
- Practically non-foaming
- Provides corrosion inhibition on steel

APPLICATIONS

- Alkaline cleaners & detergents
- Low foam alkaline systems
- High pressure alkaline spray wash
- Chlorine based cleaners
- Automatic dish liquids & detergents
- High pressure metal cleaner
- Low foam spray vac detergents
- Low foam metal cleaners
- Textile mercerizing
- Industrial detergents
- Pesticide formulations



Continued

Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

Foam Height Properties of DeTROPE SA-45

The foaming properties of DeTROPE SA-45 were determined via modified Ross-Miles, graduated cylinder shake test. The foam heights are presented in the following charts compared to sodium xylene sulfonate (SXS-40) and are reported as millimeters of foam present initially, at 30 seconds, at 60 seconds and after 2 minutes.

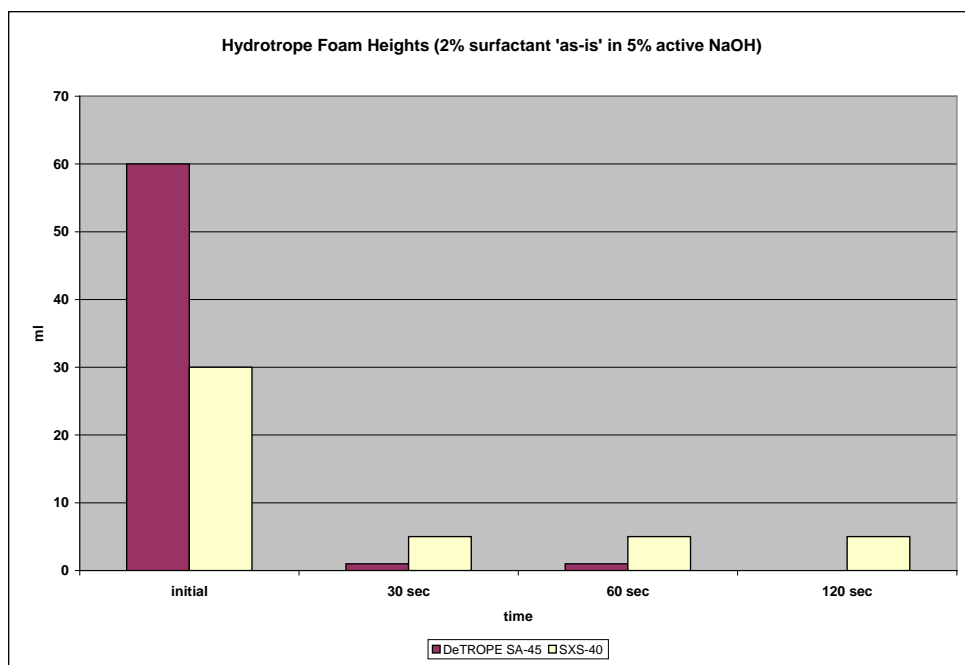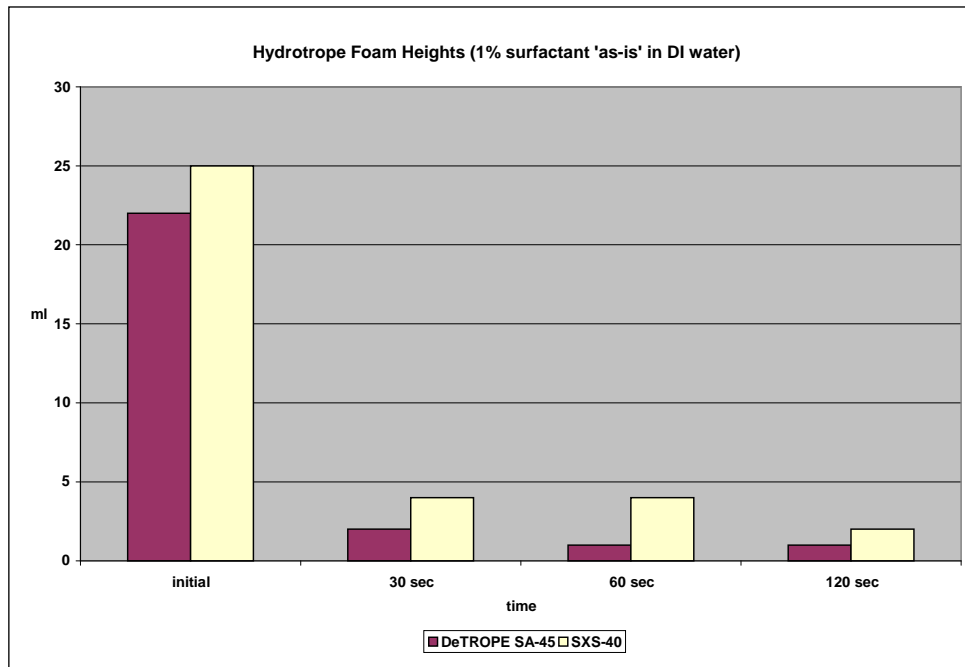

Continued


Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

Hydrotrope Cloud Point Properties of DeTROPE SA-45 (continued)

To determine hydrotrope capabilities, a series of cloud point tests were performed. The hydrotrope was solubilized in caustic or alkaline electrolyte solution to which a 9.5 mole nonyl phenol was added. Each sample was heated to the temperature at which the NPE-9.5 clouds out of solution. The higher the cloud point temperature, the more efficient the hydrotrope.

The control is 1% NPE-9.5 in each alkaline electrolyte solution without hydrotrope added. The hydrotrope capabilities of DeTROPE SA-45 at higher levels of NP-9.5 show similar trends (data available on request).

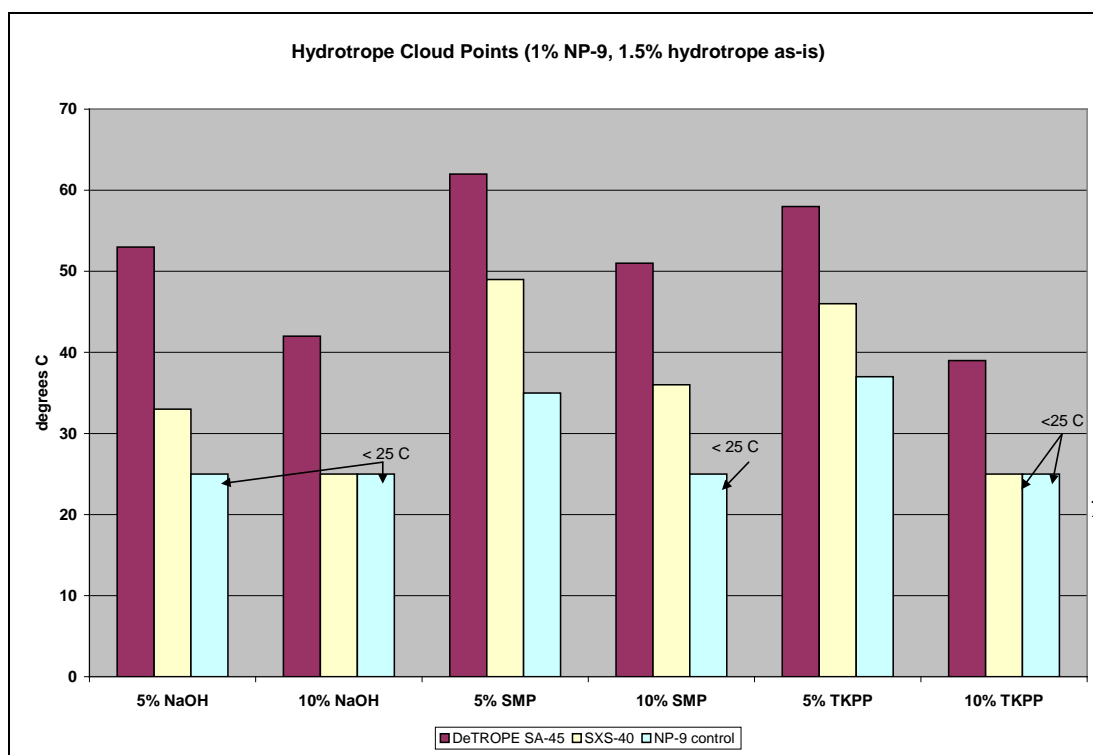

Key:

NaOH = Sodium Hydroxide
 SMP = Sodium Metasilicate Pentahydrate
 TKPP = Tetrapotassium Pyrophosphate
 SXS-40 = Sodium Xylene Sulfonate 40% active


Continued

Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.

Dynamic Surface Tension of DeTROPE SA-45

Dynamic surface tension was conducted at 1.0% and 2.0% by weight in distilled water at ambient temperature. DeTROPE SA-45 provides considerably lower surface tension as compared to SXS-40.

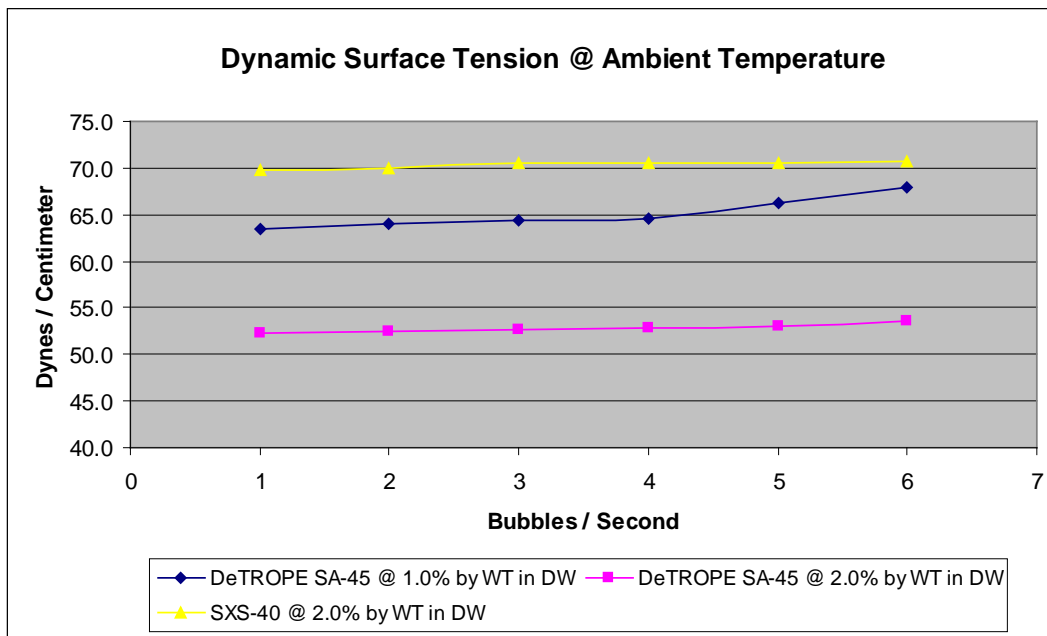


Corrosion Inhibition Properties of DeTROPE SA-45

Metal coupons were partially submerged in a solution containing from 0.25% - 1.0% by weight of DeTROPE SA-45 in hard water (100ppm as CaCO₃ and 71ppm as CaCl₂) and stored in sealed glass jars at room temperature. The top halves of the panels were exposed to the vapor phase.

90 Day Results

Steel Panels:
Q-Panel – Type RS
Low carbon, cold-rolled steel
0.063" thick, ½ hard

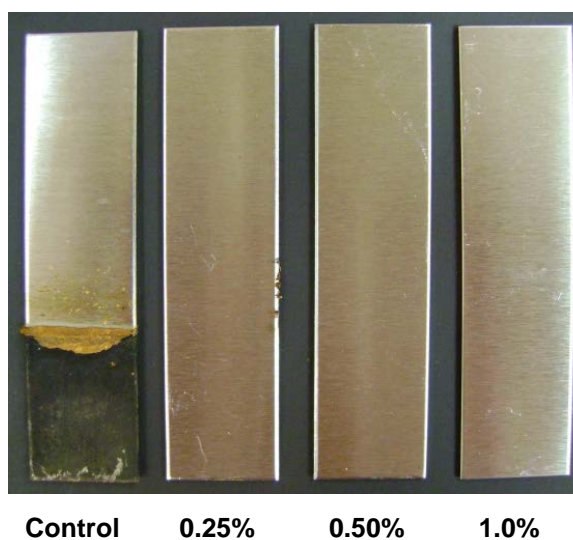

Amtec Center • 6421 Congress Avenue • Boca Raton, FL 33487 • (561) 994-9696 • FAX (561) 994-9995
www.DeForestEnterprises.com • info@DeForestent.com

The information and suggestions given are drawn from data we believe to be reliable, but in all cases the user should check and confirm the suggestions and results in his/her own use before proceeding further. DeFOREST Enterprises, Inc. offers no warranties other than to guarantee the products are manufactured to specifications and cannot assume any liability or risk involved in the use of our products since these conditions of use are beyond our control. None of the suggestions or recommendations constitute freedom from any patents that may be existent in the field or be issued.